

LOW PROFILE LP RANGE

LP-F8 PRODUCT GUIDE

LP-F8 Low Profile Self Tapping Female

The LP-F8 self-tapping female is designed for fitting into substrates with min. 9mm thickness. Compatible with all female clips in the Low Profile Range (pull out load determined by male clip used. Refer to Panel Offset Guide for gap between substrate and panel, pull out and shear loads.

LP-F8



MATERIAL:

White Acetal copolymer

USE WITH:

LP-M8A



LP-SMX



LP-SM8AS



LP-SM8H



MORE INFO:

Installation Guide LP-F8
Clip Layout Guide TD-02, TD-08
Panel Offset Guide


BENEFITS

- Hidden fixing
- Self taps into substrates from 9mm thick
- Perfect panel alignment and secure mounting every time
- Remove and refit panels in any sequence multiple times
- 5kg or 15kg pull out load per clip
- Allows for flexing and expansion of panel and support frame

APPLICATIONS

- Suitable for covered, painted and prefinished panels
- Suitable for carbon/ foam core substrates
- Refits and upgrades of existing installations
- Bedheads, artwork
- Composites and thin-walled panels

INSTALLATION: Partially exploded through section showing typical installation method

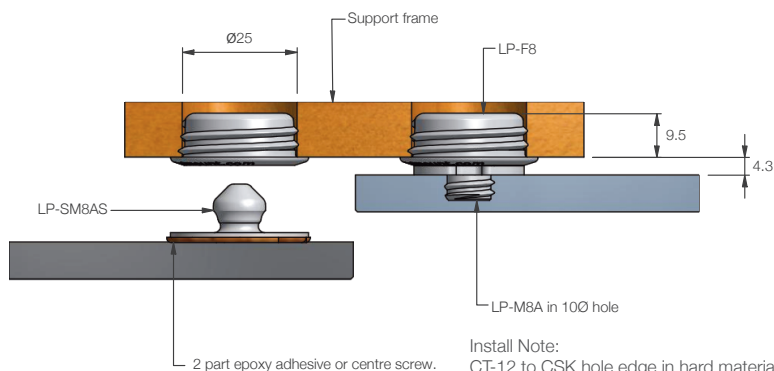

Install Note:

CT-12 to CSK hole edge in hard material (1-2mm)
For more solid substrates such as fibreglass,
use a 27 x 3mm tap to pre-thread the hole before
installing the LP-F8